


360

AUTO OFF

24/

ZW550T

Brighter for longer – 30,000 hours full brightness mode

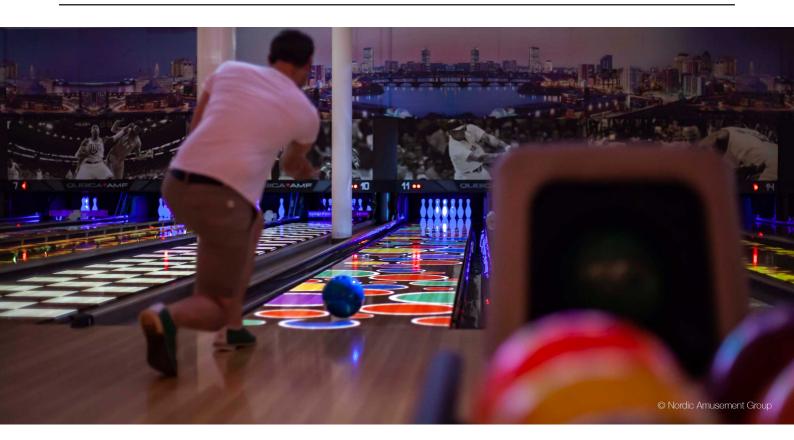

- Bright WXGA laser projector 5500 lumens
- 30,000 hours maintenance-free laser light source at full brightness mode
- Dust resistant independently tested, IP5X certification for total reliability
- Versatile orientation including 360° projection

The ZW550T professional laser projector offers 5,500 lumens at WXGA (1280 x 800) resolution. The Advanced optical components, a lightweight chassis and IP5X-certified dust resistant optical engine are just some features on this affordable projector.



Specifications

Specifications	
Display/image	
Display technology	DLP
Resolution	WXGA (1280x800)
Brightness	5,500 lumens
ANSI brightness	5,500 lumens
Contrast ratio	300,000:1
Native aspect ratio	16:10
Aspect ratio - compatible	4:3,16:9,16:10
Keystone correction - horizontal	+/-30°
Keystone correction - vertical	+/-30°
Horizontal scan rate	15.375 ~ 91.146Khz
Vertical scan rate	24 ~ 85(120 for 3D)Hz
Uniformity	85%
Screen size	0.76m ~ 7.62m (30" ~ 300") (diagonal)
Lamp info	
Light source type	
LASER life	30,000 hours
Optical	
Throw ratio	1.26:1 - 2.01:1
Projection distance (m)	1.3m - 8.14m
Zoom	1.6
Zoom type	Manual
Focal length (mm)	17.63 ~ 31.36
Lens shift	Vertical +20%, Horizontal +10%
Native offset	105%
Connectivity	
	RJ45, 1 x HDBaseT, 1 x HDMI 1.4a 3D support + MHL, 1 x 3D sync Outputs 1 x VGA (YPbPr/RGB), 1 x Audio 3.5mm, 1 x 12V trigger
General	
Noise level (typical)	28dB
PC compatibility	FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac
2D compatibility	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H//M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4,25/4,4MHz 480//p,
3D compatibility	576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) Side-by-Side:1080i50 / 60, 720p50 / 60 Frame-pack: 1080p24, 720p50 / 60 Over-Under: 1080p24, 720p50 / 60
3D	Full 3D
Security	Security bar, Kensington Lock, Password protected interface
OSD / display languages	18 languages: Arabic, Danish, Dutch, English, Finnish, French, German, Italian, Japanese, Norwegian, Polish, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional), Turkish
24/7 operation	Yes
360° operation	Yes
Operating conditions	5°C ~ 40°C, Max. Humidity 90%, Max. Altitude 3000m
Remote control	Wired backlit PRO AV remote
Speaker count	2
Watts per speaker	2 10W
In the box	AC power cord
III die Dox	Remote control 2x AAA batteries
Notworking	Basic user manual
Networking LAN - control	Yes
	100
Power Power supply	100 ~ 240V, 50 ~ 60Hz
Power supply Power consumption	0.5W
(standby)	0.011
Device a supervision (usin)	05000

250W

370W

10.7kg

405 x 387 x 159

Power consumption (min) Power consumption (max)

Weight and dimensions

Dimensions (W x D x H)

Net weight

mm





Copyright © 2018, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated. 05082019015159